

Silicon NPN Power Transistors

2SD1551

DESCRIPTION

- With TO-3P(H)IS package
- High voltage ,high speed
- Low collector saturation voltage

APPLICATIONS

- For color TV horizontal output applications

PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Base |
| 2 | Collector |
| 3 | Emitter |

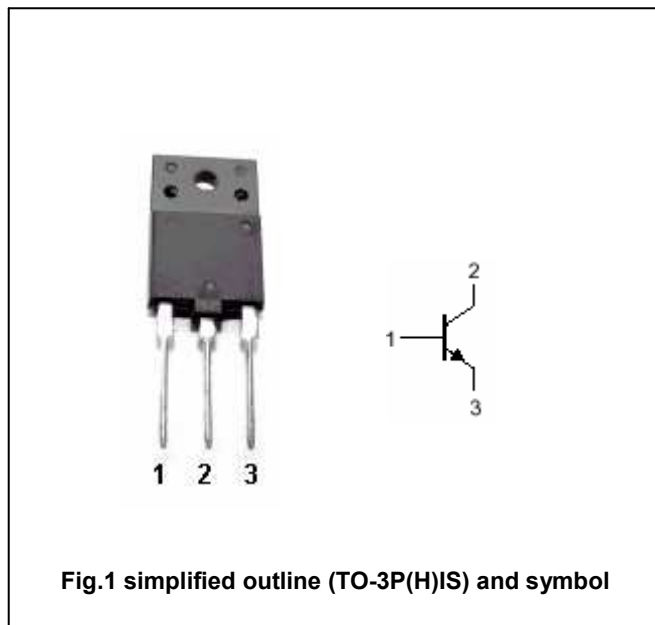


Fig.1 simplified outline (TO-3P(H)IS) and symbol

Absolute maximum ratings (Ta=25°C)

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|-----------|-----------------------------|------------------------|---------|------|
| V_{CBO} | Collector-base voltage | Open emitter | 1500 | V |
| V_{CEO} | Collector-emitter voltage | Open base | 600 | V |
| V_{EBO} | Emitter-base voltage | Open collector | 5 | V |
| I_C | Collector current | | 5 | A |
| I_B | Base current | | 2.5 | A |
| P_C | Collector power dissipation | $T_C=25^\circ\text{C}$ | 50 | W |
| T_j | Junction temperature | | 150 | °C |
| T_{stg} | Storage temperature | | -55~150 | °C |

Silicon NPN Power Transistors

2SD1551

CHARACTERISTICS


T_j=25 °C unless otherwise specified

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP. | MAX | UNIT |
|-----------------------|--------------------------------------|---|-----|------|-----|------|
| V _{CEO(SUS)} | Collector-emitter sustaining voltage | I _C =0.1A, I _B =0 | 600 | | | V |
| V _{CEsat} | Collector-emitter saturation voltage | I _C =4A; I _B =0.8A | | | 5.0 | V |
| V _{BEsat} | Base-emitter saturation voltage | I _C =4A; I _B =0.8A | | | 1.5 | V |
| I _{CBO} | Collector cut-off current | V _{CB} =800V; I _E =0 | | | 10 | μA |
| I _{EBO} | Emitter cut-off current | V _{EB} =5V; I _C =0 | | | 10 | μA |
| h _{FE} | DC current gain | I _C =1A; V _{CE} =5V | 8 | | | |
| f _T | Transition frequency | I _C =0.1A; V _{CE} =10V | | 3 | | MHz |
| C _{OB} | Collector output capacitance | I _E =0; V _{CB} =10V; f=1MHz | | 165 | | pF |

Silicon NPN Power Transistors

2SD1551

PACKAGE OUTLINE

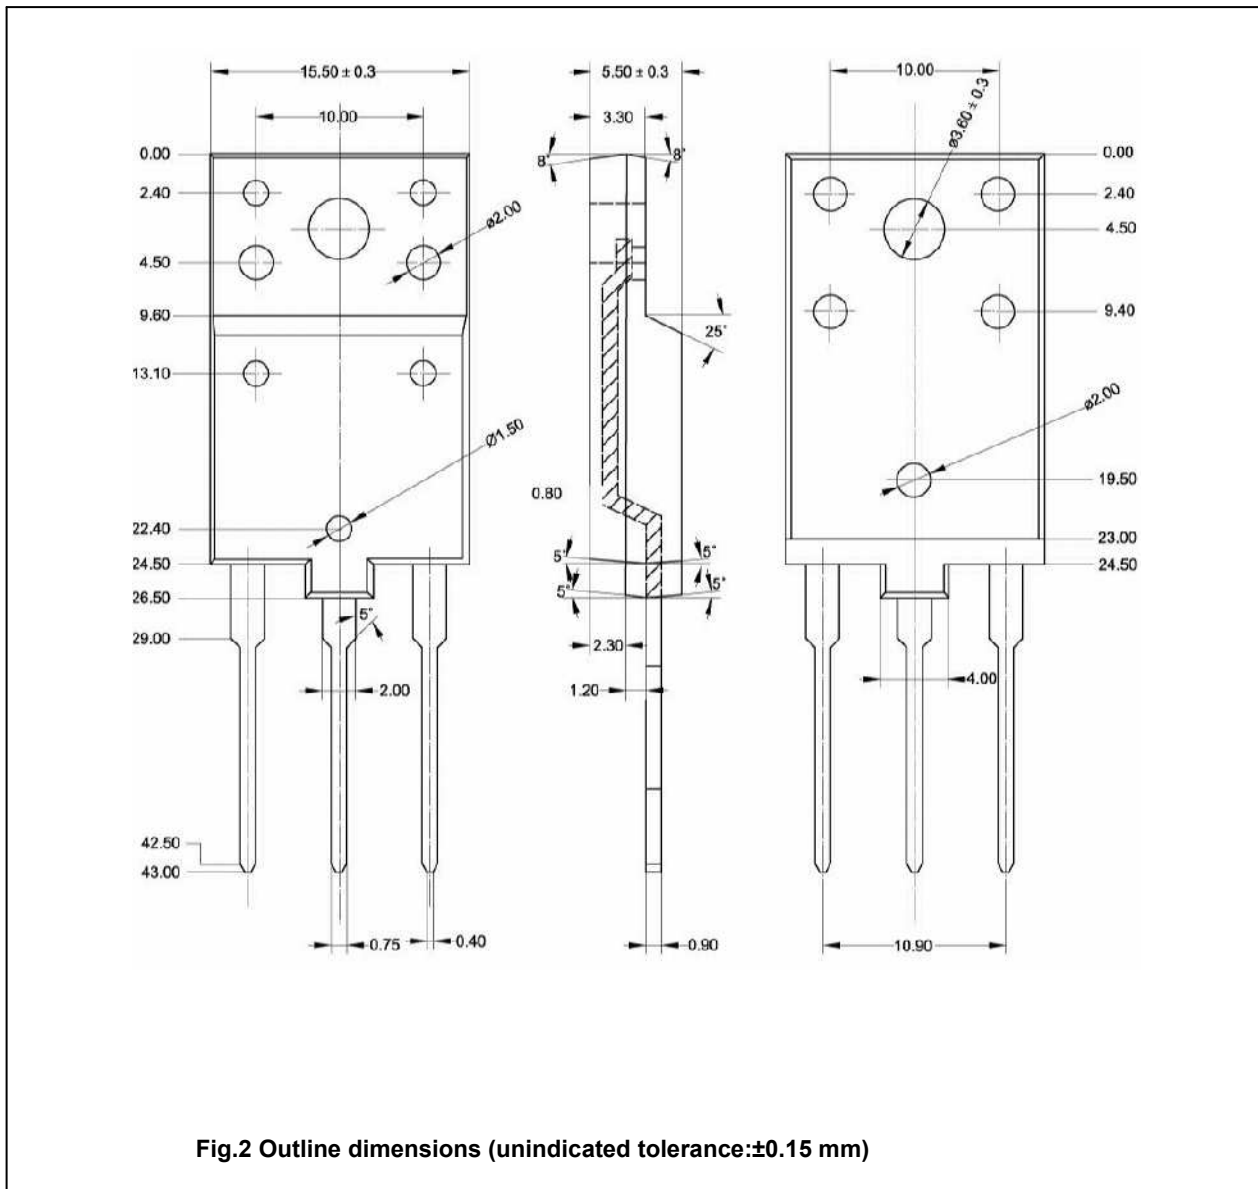

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.