

HIGH-POWER NPN SILICON POWER TRANSISTORS

...designed for use in general-purpose amplifier and switching application .

FEATURES:

- * Recommend for 150W High Fidelity Audio Frequency Amplifier Output stage
- * Complementary to 2SA1295


NPN
2SC3264

17 AMPERE
POWER
TRANSISTOR


230 VOLTS
200 WATTS

MAXIMUM RATINGS

| Characteristic | Symbol | 2SC3264 | Unit |
|---|----------------|-------------|--------------------|
| Collector-Emitter Voltage | V_{CEO} | 230 | V |
| Collector-Base Voltage | V_{CBO} | 230 | V |
| Emitter-Base Voltage | V_{EBO} | 5.0 | V |
| Collector Current - Continuous | I_C | 17 | A |
| - Peak | I_{CM} | 20 | A |
| Base current | I_B | 5.0 | A |
| Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$ | P_D | 200 1.6 | W W/ $^\circ C$ |
| Operating and Storage Junction Temperature Range | T_J, T_{STG} | -55 to +150 | $^\circ C$ |



TO-247(3P)




PIN 1.BASE
2.COLLECTOR
3.EMITTER

THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|-------------------------------------|-----------------|-------|--------------|
| Thermal Resistance Junction to Case | $R_{\theta jc}$ | 0.625 | $^\circ C/W$ |

| DIM | MILLIMETERS | |
|-----|-------------|-------|
| | MIN | MAX |
| A | 20.63 | 22.38 |
| B | 15.38 | 16.20 |
| C | 1.90 | 2.70 |
| D | 5.10 | 6.10 |
| E | 14.81 | 15.22 |
| F | 11.72 | 12.84 |
| G | 4.20 | 4.50 |
| H | 1.82 | 2.46 |
| I | 2.92 | 3.23 |
| J | 0.89 | 1.53 |
| K | 5.26 | 5.66 |
| L | 18.50 | 21.50 |
| M | 4.68 | 5.36 |
| N | 2.40 | 2.80 |
| O | 3.25 | 3.65 |
| P | 0.55 | 0.70 |

FIGURE -1 POWER DERATING

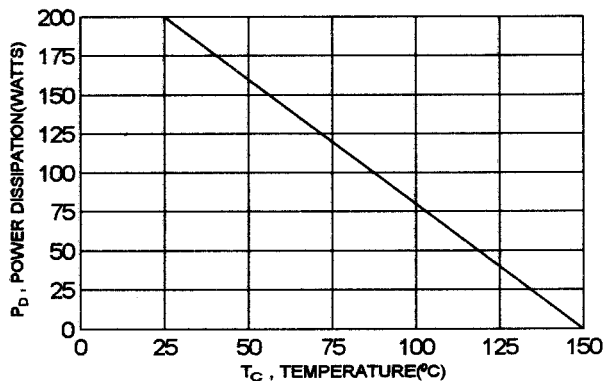

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

OFF CHARACTERISTICS

| | | | | |
|---|---------------|-----|-----|---------------|
| Collector-Emitter Breakdown Voltage ($I_C = 25\text{ mA}$, $I_B = 0$) | $V_{(BR)CEO}$ | 230 | | V |
| Collector Cutoff Current ($V_{CB} = 230\text{ V}$, $I_E = 0$) | I_{CBO} | | 100 | μA |
| Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$) | I_{EBO} | | 100 | μA |

ON CHARACTERISTICS (1)

| | | | | |
|--|---------------|----|-----|---|
| DC Current Gain ($I_C = 5.0\text{ A}$, $V_{CE} = 4.0\text{ V}$) | hFE | 40 | | |
| Collector-Emitter Saturation Voltage ($I_C = 5.0\text{ A}$, $I_B = 500\text{ mA}$) | $V_{CE(sat)}$ | | 2.0 | V |

DYNAMIC CHARACTERISTICS


| | | | | |
|--|-------|----|--|-----|
| Current-Gain-Bandwidth Product ($I_C = 2.0\text{ A}$, $V_{CE} = 12\text{ V}$, $f = 1.0\text{ MHz}$) | f_T | 10 | | MHz |
|--|-------|----|--|-----|

SWITCHING CHARACTERISTICS

| | | | | | |
|--------------|--|----------|-----------|--|---------------|
| Turn-on Time | $V_{CC} = 60\text{ V}$, $I_C = 5.0\text{ A}$ $I_{B1} = -I_{B2} = 500\text{ mA}$ $R_L = 12\text{ ohm}$ | t_{on} | 0.30(typ) | | μs |
| Storage Time | | t_s | 2.40(typ) | | μs |
| Fall Time | | t_f | 0.50(typ) | | μs |

(1) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$


ACTIVE-REGION SAFE OPERATING AREA (SOA)

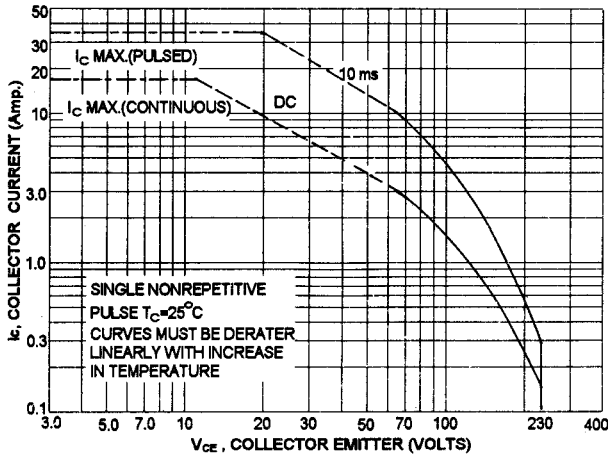


There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{J(PK)}=150^\circ\text{C}$; T_C is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.


$V_{CE}(\text{sat}) - I_B$

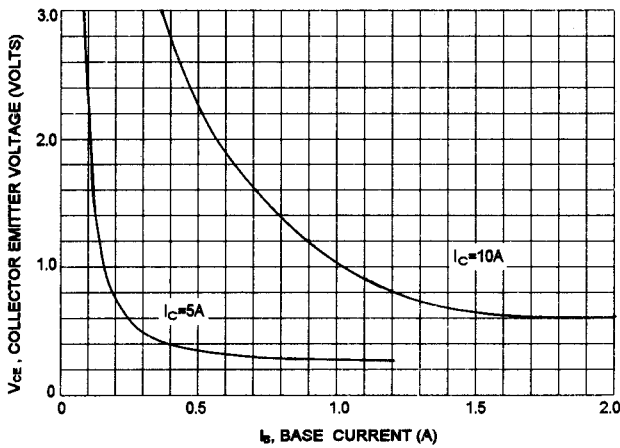


$I_C - V_{CE}$

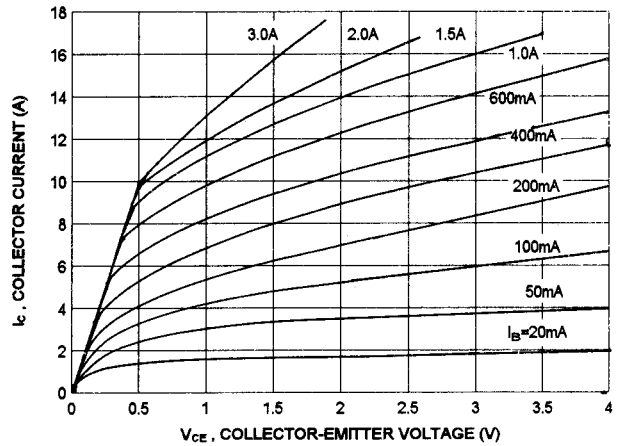

$f_T - I_C$

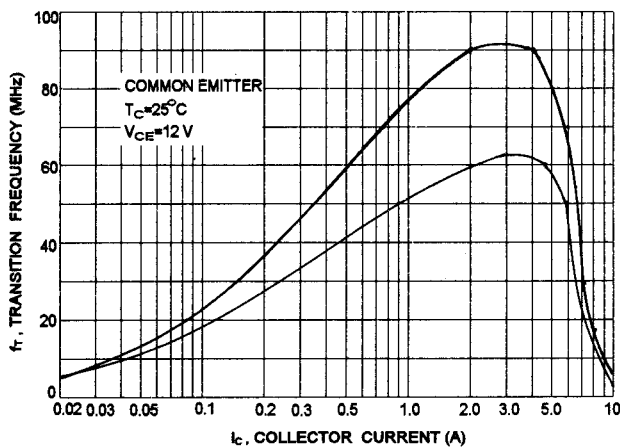

DC CURRENT GAIN

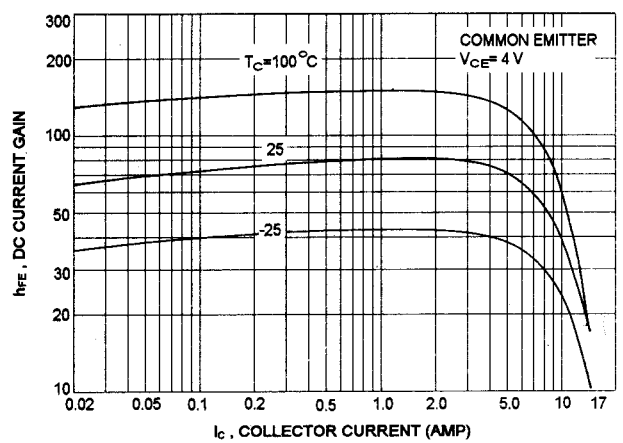

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.