


UHF BAND POWER AMPLIFIER APPLICATIONS.

FEATURES:

- Output Power :  $P_o=25W(\text{Min.})$   
( $f=470\text{MHz}$ ,  $V_{CC}=12.6V$ ,  $P_i=10W$ )
- 100% Tested for Load Mismatch Stress at All Phase Angles with 30:1 VSWR @  $V_{CC}=12.6V$ ,  $P_i=10W$ ,  $f=470\text{MHz}$

MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	35	V
Collector-Emitter Voltage	$V_{CEO}$	18	V
Emitter-Base Voltage	$V_{EBO}$	3.5	V
Collector Current	$I_C$	6	A
Collector Power Dissipation ( $T_c=25^\circ\text{C}$ )	$P_C$	50	W
Junction Temperature	$T_j$	175	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-65 ~ 175	$^\circ\text{C}$

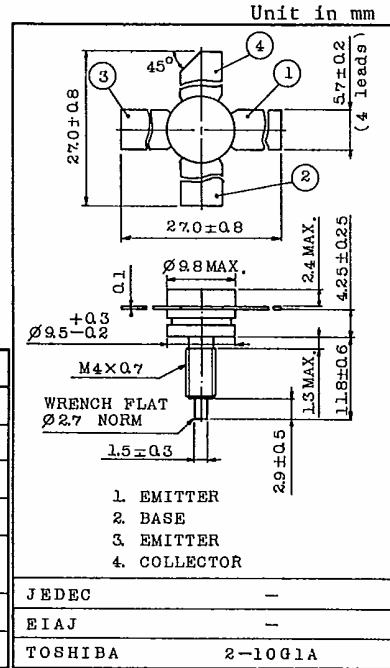


Mounting Kit No. AC57  
Weight : 3.3g

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=15V$ , $I_E=0$	-	-	1	mA
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=10\text{mA}$ , $I_E=0$	35	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=25\text{mA}$ , $I_B=0$	17	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=1\text{mA}$ , $I_C=0$	3.5	-	-	V
DC Current Gain	$h_{FE}$	$V_{CE}=5V$ , $I_C=3A$	10	-	-	
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V$ , $I_E=0$ , $f=1\text{MHz}$	-	-	80	pF
Output Power	$P_o$	(Fig.)	25	28	-	W
Power Gain	$G_{pe}$	$V_{CC}=12.6V$ , $f=470\text{MHz}$ ,	3.9	4.5	-	dB
Collector Efficiency	$\eta_c$	$P_i=10W$	60	-	-	%
Series Equivalent Input Impedance	$Z_{IN}$	$V_{CC}=12.6V$ , $f=470\text{MHz}$ ,	-	1.1+ j2.6	-	$\Omega$
Series Equivalent Output Impedance	$Z_{OUT}$	$P_o=25W$	-	3.7+ j0.8	-	$\Omega$

# 2SC2173

Fig.  $f=470\text{MHz}$   $P_o$  TEST CIRCUIT

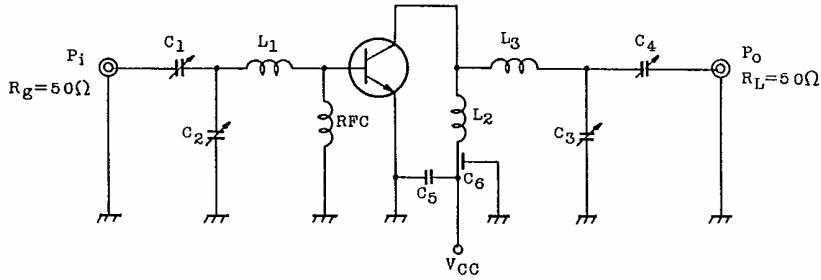

$C_1, C_3$  : 1.5 ~ 5pF

$C_2, C_4$  : 2.2 ~ 15pF



$C_5$  : 0.01 $\mu$ F

$C_6$  : 1000pF FEED THROUGH

$L_1, L_3$  : 5mm $\times$ 15mm COPPER PLATE

$L_2$  :  $\phi$ 1 SILVER PLATED COPPER WIRE, 10ID,  $\frac{1}{2}$ T

RFC :  $\phi$ 1 ENAMEL COATED COPPER WIRE, 3ID, 5T

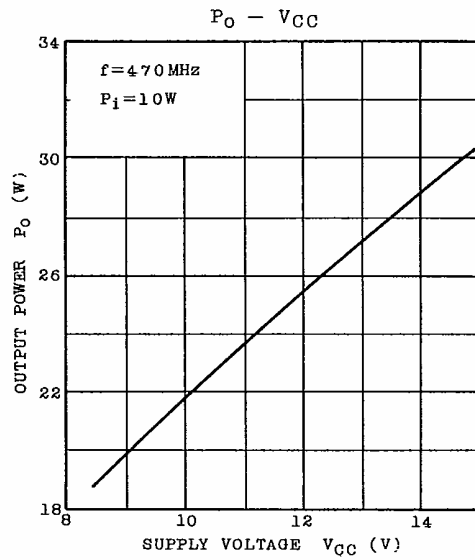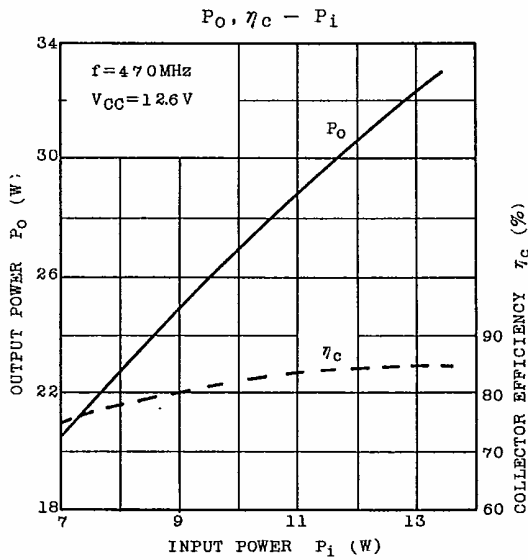

TOSHIBA CORPORATION

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.